

King Slide®

King Slide Works Co., Ltd.

No. 299, Shun An Rd., Lu Zhu Shiang,
Kaohsiung County 82150, Taiwan
Tel: +886-7-959-9688
Fax: +886-7-696-7018
E-mail: sales@kingslide.com
Website: www.kingslide.com

King Slide Technology Co., Ltd.

No. 6, Luke 9th Rd., Lu Zhu Shiang,
Kaohsiung County 82151, Taiwan
Tel: +886-7-976-1688
E-mail: sales@kingslide.com

King Slide USA, Inc.

12989 Bellaire Blvd #8,
Houston TX77072, U.S.A.
Tel: +1-713-750-9063
Fax: +1-713-750-9127
Mobile: +1-832-858-2777
E-mail: sales@kingslide.com

King Slide Technology (China) Co., Ltd.

Room 426, No. 473 West (1) Fute Rd.,
Waigaoqiao Free Trade Zone,
Shanghai 201206, China
Tel: +86-21-5866-0242
Fax: +86-21-5852-0915
Mobile: +86-15026651529
E-mail: sales@kingslide.com

Spain Sales

Mobile: +34-660849053
E-mail: sales@kingslide.com

Professional in Rack Mount Kit

HIGH PERFORMANCE BALL BEARING SLIDES
FOR INDUSTRIAL & ELECTRONIC APPLICATIONS.



ISO9001 & ISO14001



COMPANY PROFILE

For over 30 years, King Slide has grown to be a major manufacturer of electronic ball bearing slide. Consistent high quality product and well-planned production capacity in its Taiwan factory have earned the trust of customers worldwide. Three driving forces have contributed to our achievements today and will keep propelling us into the future: Quality, Technology and Innovation.

Quality:

ISO-9001/14001 certified quality system assures our customers that every single product from King Slide has been manufactured under rigorous step by step scrutiny from acquisition of source material through various stages of production, packaging and delivery. Implementation of complex quality system is well orchestrated and practiced to the extent that every employee performs his/her quality duty as a second nature.

Technology:

State of the art design and production technology have kept us ahead of our competition and our own expectation. Computer aided design and analysis system (CAD/CAE) and electronic network have enhanced our ability to communicate directly with our customers. Moreover, these systems also optimize our product design and production tooling to achieve better quality, prompt prototype, and production delivery. Automation technology through integration of CAD, MRP, production and AS/RS systems ensures highest quality consistency and manufacturing efficiency.



Innovation:

Our products are constantly improved according to customer's feedback and results of our laboratory's rigorous tests to achieve longer operating life cycles and higher quality/cost ratio. New products or new functions are regularly added to our product line to provide customers with the server rack mount slide which is more convenient to install, more reliable and safer to use.



Taiwan Factory

Established : 1977

Employees : 560

Factory Area : 30,000m²

Technology Factory Area : 184,284m²

To Our Dear User:

This guide is designed to help you in making the suitable slide selection for your application. The following list of slide profile and mounting hardware can make you easier to decide and select.

The Factors You Have To Consider In Selecting A Slide :

- 1.Side space available between chassis & rack
- 2.Weight, height, width and depth of chassis and rack.
- 3.Disconnect of chassis/drawer required
- 4.Travel preferred
- 5.Locks desired
- 6.Mounting holes considered necessary
- 7.Optional mounting hardware for mounting in rack or enclosure

Clearance(Side Space) :

The space is amount between chassis and rack. The clearance dimension is serious for the best smooth movement.

Front Release :

Allows the chassis to be removed from the rack.

Lock-in & Lock-out :

Lock the slide/rail in position. The latch must be actuated to move the slide. A lock-out feature assists servicing components without removing the unit from the enclosure. A lock-in feature prevents chassis from opening until a latch is actuated.

Disconnect :

Detaching the chassis together with the innermost member from the cabinet member of the slide.

Cable Management Arm :

Prevents sagging and tangling of cable when the chassis is moved.




AA60	Full Extension Thin Slide With Bracket & CMA	7
AA61	Full Extension Thin Slide With Bracket & CMA	8
AA61	Full Extension Thin Slide With Bracket	9
AA68	Full Extension Thin Slide With Bracket	10
AN61	Heavy Duty Thin Slide With Bracket & CMA	11
AN68	Heavy Duty Thin Slide With Bracket	12
3Q61	Full Extension Ball Bearing Slide With Bracket & CMA	13
3Q68	Full Extension Ball Bearing Slide With Bracket	14
3A60	Full Extension Ball Bearing Slide With Bracket & CMA	15
3A61	Full Extension Ball Bearing Slide With Bracket & CMA	16
3A68	Full Extension Ball Bearing Slide	17
3A68-0A	Full Extension Ball Bearing Slide With Bracket	18
3A68-0C	Full Extension Ball Bearing Slide With Bracket	19
AR68	Heavy Duty Slide With Bracket	20
3B61	Full Extension Ball Bearing Slide With Bracket & CMA	21
3B35	Full Extension Ball Bearing Slide	22
3B66	Full Extension Ball Bearing Slide	23
AE68	Heavy Duty Slide With Bracket	24
3X68	Heavy Duty Slide With Bracket	25
AD23	Heavy Duty Slide -Standard Type	26
AD68	Heavy Duty Slide With Bracket	27
3C28	Full Extension Ball Bearing Slide	28
3C29	Full Extension Ball Bearing Slide	29
3C60	Full Extension Ball Bearing Slide With Bracket & CMA	30
3C34	Full Extension Ball Bearing Slide	31
3D29	Full Extension Ball Bearing Slide	32
3D61	Full Extension Ball Bearing Slide With Bracket	33
3S55	Full Extension Ball Bearing Slide With Bracket	34
3S30	Full Extension Ball Bearing Slide	35
3T30	Full Extension Ball Bearing Slide	36
3G35	3/4 Extension Ball Bearing Slide With Bracket	37
3535	3/4 Extension Ball Bearing Slide	38

Page	7	8	9	10	11	12	13	14	15	16	17	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38							
Model Number	AA60	AA61	AA61	AA68	AN61	AN68	3Q61	3Q68	3A60	3A61	3A68	AR68	3B61	3B35	3B66	AE68	3X68	AD23	AD68	3C28	3C29	3C60	3C34	3D29	3D61	3S55	3S30	3T30	3G35	3535							
Max. Load Rating in kg (lbs)	39 (86)	39 (86)	39 (86)	39 (86)	83.9 (185)	83.9 (185)	39 (86)	39 (86)	45.5 (100)	45.5 (100)	47.6 (105)	68 (150)	68 (150)	68 (150)	68 (150)	90.7 (200)	90.7 (200)	136.1 (300)	136.1 (300)	45.5 (100)	45.5 (100)	45.5 (100)	45.5 (100)	43 (95)	39 (86)	22.7 (50)	22.7 (50)	22.7 (50)	36.3 (80)	45.5 (100)							
Height in mm (inch)	38 (1.5)	38 (1.5)	38 (1.5)	38 (1.5)	55 (2.17)	55 (2.17)	27 (1.06)	27 (1.06)	41 (1.6)	41 (1.6)	41 (1.6)	48.7 (1.92)	51 (2)	51 (2)	51 (2)	54 (2.13)	54 (2.13)	53 (2.09)	53 (2.09)	35 (1.37)	35 (1.37)	35 (1.37)	35 (1.37)	27 (1.06)	27 (1.06)	19.3 (.76)	19.3 (.76)	19.3 (.76)	26.2 (1.03)	35 (1.37)							
Side Space in mm (inch)	6.7 (.265)	6.7 (.265)	6.7 (.265)	6.7 (.265)	6.7 (.265)	6.7 (.265)	9.7 (.38)	9.7 (.38)	9.7 (.38)	9.7 (.38)	9.7 (.38)	11.3 (.44)	12.7 (.5)	12.7 (.5)	12.7 (.5)	12.7 (.5)	16 (.63)	19 (.75)	19 (.75)	19 (1.76)	19.4 (.76)	19.4 (.76)	19.4 (.76)	19.4 (.76)	17.6 (.7)	15 (.59)	15 (.59)	7.5 (.30)	9 (.354)	9.7 (.38)							
3/4 Extension																																					
Full Extension																																					
One-Way Front Release																																					
Two-Way Front Release																																					
Side Release																																					
Front Disconnect																																					
Self-Closing																																					
Lock-in																																					
Lock-out																																					
EIA Mounting Brackets																																					
IEC Mounting Brackets																																					
Cable Management Arm																																					
Installation	Installation																																				
Bracket	Screw-on																																				
	Tool-less																																				
Chassis	Screw-on																																				
	Stab-in																																				
CMA	Tool-less																																				
Application : Support Chassis	Applications: Support Chassis																																				
Standard Width	436	436	436	436	436	436	425-430	425-430	425-430	425	425	425	423.5	425	425	425	425	417	417	425	425	425	425	425	430	435	435		435	425-430							
Customized(Max) Width	440	440	440	440	440	440	434	434	434	434	434	430	430	430	430	430	430	420	420	430	430	428	430	430	432	440	440		437	434							
1U																																					
2U																																					
3U																																					
4U																																					
5U																																					
6U																																					
7U & 7U up																																					

AA60

New The Thinnest Slide

Full Extension Thin Slide With Bracket & Cable Management Arm

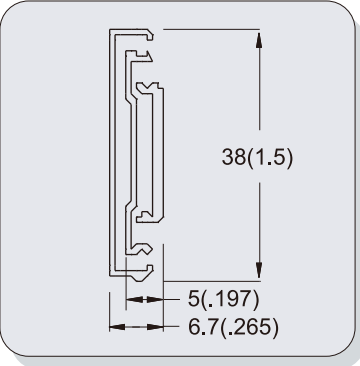

AA60 This product line holds the following patents from various countries:

TW-PAT. NO.203242、NO.215740、NO.216637、NO.225569
CN-PAT. NO.583196、NO.614620、NO.614798、NO.692483
US-PAT. NO.6851773、NO.6860575、NO.6883884、NO.6935710
GB-PAT. NO.2393477、NO.2400785、NO.2400786、NO.2401534
DE-PAT. NO.20215143.3、NO.20308323.7、NO.20308324.5、
NO.20308325.3
JP-PAT. NO.3093452、NO.3097863、NO.3097864、
NO.3098133



Specifications / Features

- Height:
38mm (1.5 inches)
Load capacity up to 39.0kg (86lbs) / pair
- Width/Side Space :
6.7mm (.265 inches)
- Installation :
Bracket : Screw-on
Chassis : Stab-in/Screw-on
Cable Management Arm : Tool-less
- Function:
Lock-in/out & Two Way Front Release,
Front Disconnect
- Finish :
Electroplated Zinc, Clear Bright or Black
- Material :
Cold Rolled Steel
- Packing :
1 set/box 20 boxes/crate
- Application:
For Chassis 1U - 2U
Depth : 350mm - 813mm
Width : 436mm - 440mm

Installation Dimensions


unit:mm

ITEM NO	LENGTH mm(inch)	TRAVEL mm(inch)
AA60-356	355.6 (14)	389.2 (15.32)
AA60-406	406.4 (16)	440.0 (17.32)
AA60-457	457.2 (18)	490.8 (19.32)
AA60-508	508.0 (20)	541.6 (21.32)
AA60-559	558.8 (22)	592.4 (23.32)
AA60-610	609.6 (24)	643.2 (25.32)
AA60-660	660.4 (26)	694.0 (27.32)
AA60-711	711.2 (28)	744.8 (29.32)
AA60-762	762.0 (30)	795.6 (31.32)
AA60-813	812.8 (32)	846.4 (33.32)

AA61

New The Thinnest Slide

Full Extension Thin Slide With Bracket & Cable Management Arm

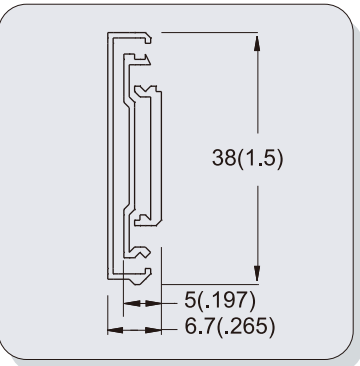

AA61 This product line holds the following patents from various countries:

TW-PAT. NO.203242、NO.215740、NO.216637、NO.225569、NO.I304721、
NO.I305138
CN-PAT. NO.583196、NO.614620、NO.614798、NO.692483
US-PAT. NO.6851773、NO.6860575、NO.6883884、NO.6935710
GB-PAT. NO.2393477、NO.2400785、NO.2400786、NO.2401534、
NO.2442701
DE-PAT. NO.20215143.3、NO.20308323.7、NO.20308324.5、
NO.20308325.3、NO.202006014358.0、
NO.202006015751.4

JP-PAT. NO.3093452、NO.3097863、
NO.3097864、NO.3098133、
NO.3127644、
NO.3128375



Specifications / Features

- Height:
38mm (1.5 inches)
Load capacity up to 39.0kg (86 lbs) / pair
- Width/Side Space :
6.7mm (.265 inches)
7.9mm (.311 inches) with Bracket
- Installation :
Bracket : Tool-less
Chassis : Stab-in/Screw-on
Cable Management Arm : Tool-less
- Function:
Lock-in/out & Two Way Front Release,
Front Disconnect
- Finish :
Electroplated Zinc, Clear Bright or Black
- Material :
Cold Rolled Steel
- Packing :
1 set/box 20 boxes/crate
- Application:
For Chassis 1U - 2U
Depth : 350mm - 813mm
Width : 436mm - 440mm

Installation Dimensions


unit:mm

ITEM NO	LENGTH mm(inch)	TRAVEL mm(inch)
AA61-356	355.6 (14)	389.2 (15.32)
AA61-406	406.4 (16)	440.0 (17.32)
AA61-457	457.2 (18)	490.8 (19.32)
AA61-508	508.0 (20)	541.6 (21.32)
AA61-559	558.8 (22)	592.4 (23.32)
AA61-610	609.6 (24)	643.2 (25.32)
AA61-660	660.4 (26)	694.0 (27.32)
AA61-711	711.2 (28)	744.8 (29.32)
AA61-762	762.0 (30)	795.6 (31.32)
AA61-813	812.8 (32)	846.4 (33.32)

AA61

New The Thinnest Slide

Full Extension Thin Slide With Bracket

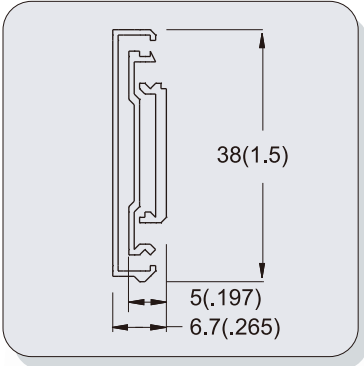

AA61 This product line holds the following patents from various countries:

TW-PAT. NO.203242、NO.215740、NO.216637、NO.225569、
NO.I304721、NO.I305138
CN-PAT. NO.583196、NO.614620、NO.614798、NO.692483
US-PAT. NO.6851773、NO.6860575、NO.6883884、NO.6935710
GB-PAT. NO.2393477、NO.2400785、NO.2400786、NO.2401534、
NO.2442701
DE-PAT. NO.20215143.3、NO.20308323.7、NO.20308324.5、
NO.20308325.3、NO.202006014358.0、
NO.202006015751.4

JP-PAT. NO.3093452、NO.3097863、
NO.3097864、NO.3098133、
NO.3127644、NO.3128375



Specifications / Features

- Height:
38mm (1.5 inches)
Load capacity up to 39kg (86 lbs) / pair
- Width/Side Space :
6.7mm (.265 inches)
7.9mm (.311 inches) with Bracket
- Installation :
Bracket : Tool-less
Chassis : Stab-in/Screw-on
- Function:
Lock-in/out & Two Way Front Release,
Front Disconnect
- Finish :
Electroplated Zinc, Clear Bright or Black
- Material :
Cold Rolled Steel
- Packing :
1 set/box 20 boxes/crate
- Application:
For Chassis 1U - 2U
Depth : 350mm - 813mm
Width : 436mm - 440mm


Installation Dimensions

ITEM NO	unit:mm	
	LENGTH mm(inch)	TRAVEL mm(inch)
AA61-356	355.6 (14)	389.2 (15.32)
AA61-406	406.4 (16)	440.0 (17.32)
AA61-457	457.2 (18)	490.8 (19.32)
AA61-508	508.0 (20)	541.6 (21.32)
AA61-559	558.8 (22)	592.4 (23.32)
AA61-610	609.6 (24)	643.2 (25.32)
AA61-660	660.4 (26)	694.0 (27.32)
AA61-711	711.2 (28)	744.8 (29.32)
AA61-762	762.0 (30)	795.6 (31.32)
AA61-813	812.8 (32)	846.4 (33.32)

AA68

New The Thinnest Slide

Full Extension Thin Slide With Bracket

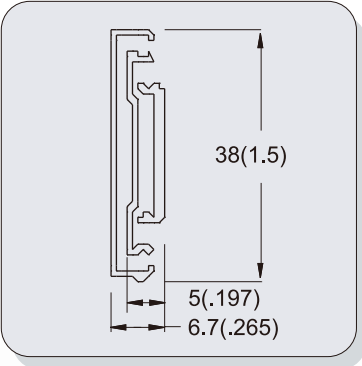

AA68 This product line holds the following patents from various countries:

TW-PAT. NO.215740、NO.216637、NO.225569
CN-PAT. NO.614620、NO.614798、NO.692483
US-PAT. NO.6851773、NO.6860575、NO.6935710
GB-PAT. NO.2400785、NO.2400786、NO.2401534
DE-PAT. NO.20308323.7、NO.20308324.5、NO.20308325.3
JP-PAT. NO.3097863、NO.3097864、NO.3098133



Specifications / Features

- Height:
38mm (1.5 inches)
Load capacity up to 39.0kg (86 lbs) / pair
- Width/Side Space :
6.7mm (.265 inches)
7.9mm (.311 inches) with Bracket
- Installation :
Bracket : Screw-on
Chassis : Stab-in/Screw-on
- Function:
Lock-out & Two Way Front Release,
Front Disconnect
- Finish :
Electroplated Zinc, Clear Bright or Black
- Material :
Cold Rolled Steel
- Packing :
156 pairs/crate
- Application:
For Chassis 1U - 2U
Depth : 350mm - 813mm
Width : 436mm - 440mm


Installation Dimensions

ITEM NO	unit:mm	
	LENGTH mm(inch)	TRAVEL mm(inch)
AA68-356	355.6 (14)	389.2 (15.32)
AA68-406	406.4 (16)	440.0 (17.32)
AA68-457	457.2 (18)	490.8 (19.32)
AA68-508	508.0 (20)	541.6 (21.32)
AA68-559	558.8 (22)	592.4 (23.32)
AA68-610	609.6 (24)	643.2 (25.32)
AA68-660	660.4 (26)	694.0 (27.32)
AA68-711	711.2 (28)	744.8 (29.32)
AA68-762	762.0 (30)	795.6 (31.32)
AA68-813	812.8 (32)	846.4 (33.32)

AN61

New Thinnest Heavy Duty Slide

Heavy Duty Thin Slide With Bracket & Cable Management Arm

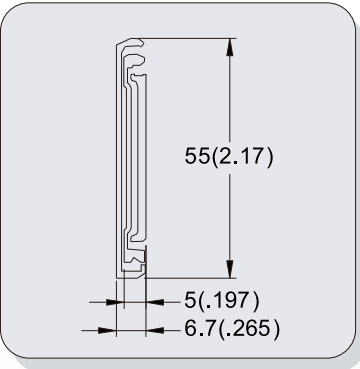

AN61 This product line holds the following patents from various countries:

TW-PAT. NO.215740、NO.216637、NO.225569、NO.I304721、NO.I305138
CN-PAT. NO.614620、NO.614798、NO.692483
US-PAT. NO.6851773、NO.6860575、NO.6935710
GB-PAT. NO.2400785、NO.2400786、NO.2401534、NO.2442701
DE-PAT. NO.20308323.7、NO.20308324.5、NO.20308325.3、
NO.202006014358.0、NO.202006015751.4
JP-PAT. NO.3097863、NO.3097864、NO.3098133、
NO.3127644、NO.3128375



Specifications / Features

- Height: 55mm (2.17 inches)
Load capacity up to 83.9kg (185 lbs) / pair
- Width/Side Space : 6.7mm (.265 inches)
7.9mm (.311inches) with Bracket
- Installation : Bracket : Tool-less
Chassis : Stab-in/Screw-on
Cable Management Arm : Tool-less
- Function: Lock-in/out & Two Way Front Release,
Front Disconnect
- Finish : Electroplated Zinc, Clear Bright or Black
- Material : Cold Rolled Steel
- Packing : 1 set/box 10 boxes/crate
- Application: For Chassis 3U - 7U
Depth : 350mm - 813mm
Width : 436mm - 440mm


Installation Dimensions

ITEM NO	unit:mm	
	LENGTH mm(inch)	TRAVEL mm(inch)
AN61-356	355.6 (14)	389.2 (15.32)
AN61-406	406.4 (16)	440.0 (17.32)
AN61-457	457.2 (18)	490.8 (19.32)
AN61-508	508.0 (20)	541.6 (21.32)
AN61-559	558.8 (22)	592.4 (23.32)
AN61-610	609.6 (24)	643.2 (25.32)
AN61-660	660.4 (26)	694.0 (27.32)
AN61-711	711.2 (28)	744.8 (29.32)
AN61-762	762.0 (30)	795.6 (31.32)
AN61-813	812.8 (32)	846.4 (33.32)

AN68

New Thinnest Heavy Duty Slide

Heavy Duty Thin Slide With Bracket

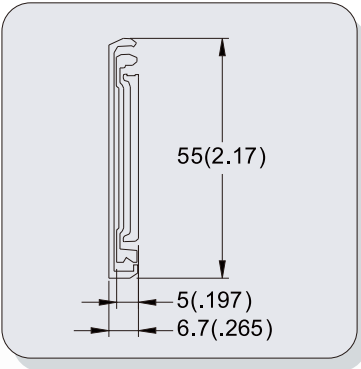

AN68 This product line holds the following patents from various countries:

TW-PAT. NO.215740、NO.216637、NO.225569、NO.I271168
CN-PAT. NO.614620、NO.614798、NO.692483
US-PAT. NO.6851773、NO.6860575、NO.6935710、NO.7357468
GB-PAT. NO.2400785、NO.2400786、NO.2401534、NO.2434081
DE-PAT. NO.20308323.7、NO.20308324.5、
NO.20308325.3、NO.202006000519.6
JP-PAT. NO.3097863、NO.3097864、NO.3098133、
NO.3120872



Specifications / Features


- Height: 55mm (2.17 inches)
Load capacity up to 83.9kg (185 lbs) / pair
- Width/Side Space : 6.7mm (.265 inches)
7.9mm (.311inches) with Bracket
- Installation : Bracket : Screw-on
Chassis : Stab-in/Screw-on
- Function: Lock-out & Two Way Front Release,
Front Disconnect
- Finish : Electroplated Zinc, Clear Bright or Black
- Material : Cold Rolled Steel
- Packing : 120 pairs/crate
- Application: For Chassis 3U - 7U
Depth : 350mm - 813mm
Width : 436mm - 440mm

Installation Dimensions

ITEM NO	unit:mm	
	LENGTH mm(inch)	TRAVEL mm(inch)
AN68-356	355.6 (14)	389.2 (15.32)
AN68-406	406.4 (16)	440.0 (17.32)
AN68-457	457.2 (18)	490.8 (19.32)
AN68-508	508.0 (20)	541.6 (21.32)
AN68-559	558.8 (22)	592.4 (23.32)
AN68-610	609.6 (24)	643.2 (25.32)
AN68-660	660.4 (26)	694.0 (27.32)
AN68-711	711.2 (28)	744.8 (29.32)
AN68-762	762.0 (30)	795.6 (31.32)
AN68-813	812.8 (32)	846.4 (33.32)

3Q61

Full Extension Ball Bearing Slide With Bracket & Cable Management Arm

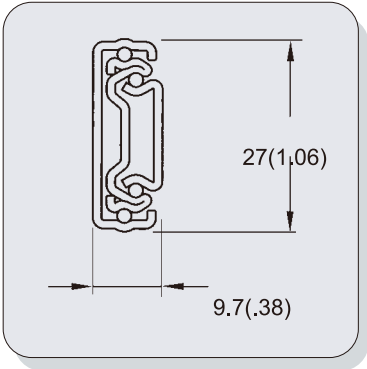

3Q61 This product line holds the following patents from various countries:

TW-PAT. NO.215740、NO.225569、NO.I261509、NO.I249605、NO.I304721、NO.I305138
CN-PAT. NO.614620、NO.692483
US-PAT. NO.6851773、NO.6935710
GB-PAT. NO.2400786、NO.2401534、NO.2427540、NO.2420964、NO.2442701
DE-PAT. NO.20308323.7、NO.20308325.3、NO.202006008564.5、NO.202004019451.1、NO.202006014358.0、NO.202006015751.4
JP-PAT. NO.3097864、NO.3098133、NO.3125604、NO.3116135、NO.3127644、NO.3128375



Specifications / Features


- Height: 27mm (1.06 inches)
Load capacity up to 39.0kg (86 lbs) / pair
- Installation : Bracket : Tool-less
Chassis : Stab-in/Screw-on
Cable Management Arm : Tool-less
- Function: Lock-in/out & One Way Front Release, Front Disconnect
- Finish : Electroplated Zinc, Clear Bright or Black
- Material : Cold Rolled Steel
- Packing : 1 set/box 30 boxes/crate
- Application: For Chassis 1U - 2U
Depth : 350mm - 820mm
Width : 430mm

Installation Dimensions

ITEM NO	LENGTH mm(inch)	TRAVEL mm(inch)	unit:mm
3Q61-618	618 (24.33)	623 (24.52)	
3Q61-820	820 (32.28)	759 (29.88)	

3Q68

Full Extension Ball Bearing Slide With Bracket

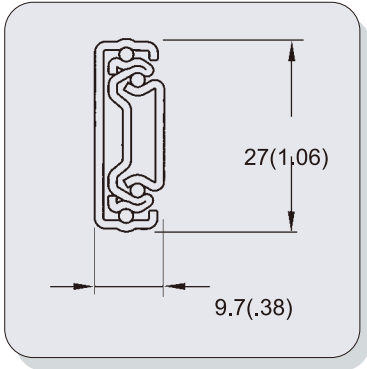

3Q68 This product line holds the following patents from various countries:

TW-PAT. NO.215740、NO.225569、NO.I261509
CN-PAT. NO.614620、NO.692483
US-PAT. NO.6851773、NO.6935710
GB-PAT. NO.2400786、NO.2401534、NO.2427540
DE-PAT. NO.20308323.7、NO.20308325.3、NO.202006008564.5
JP-PAT. NO.3097864、NO.3098133、NO.3125604



Specifications / Features


- Height: 27mm (1.06 inches)
Load capacity up to 39.0kg (86 lbs) / pair
- Installation : Bracket : Screw-on
Chassis : Stab-in/Screw-on
- Function: Lock-out & One Way Front Release, Front Disconnect
- Finish : Electroplated Zinc, Clear Bright or Black
- Material : Cold Rolled Steel
- Packing : 800 pairs/crate
- Application: For Chassis 1U - 2U
Depth : 305mm - 813mm
Width : 425mm - 434mm

Installation Dimensions

ITEM NO	LENGTH mm(inch)	TRAVEL mm(inch)	unit:mm
3Q68-305	304.8 (12)	355.6 (14)	
3Q68-356	355.6 (14)	406.4 (16)	
3Q68-406	406.4 (16)	457.2 (18)	
3Q68-457	457.2 (18)	508.0 (20)	
3Q68-508	508.0 (20)	558.8 (22)	
3Q68-559	558.8 (22)	609.6 (24)	
3Q68-610	609.6 (24)	660.4 (26)	
3Q68-660	660.4 (26)	711.2 (28)	
3Q68-711	711.2 (28)	762.0 (30)	
3Q68-762	762.0 (30)	812.8 (32)	
3Q68-813	812.8 (32)	863.6 (34)	

3A60

Full Extension Ball Bearing Slide With Bracket & Cable Management Arm

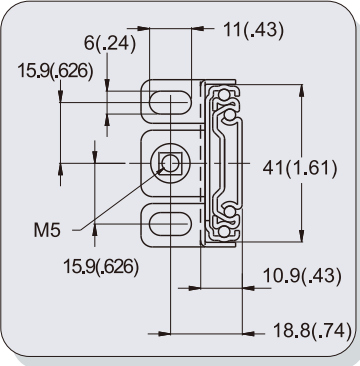

3A60 This product line holds the following patents from various countries:

TW-PAT. NO.203242、NO.215740、NO.216637、NO.216740、NO.225569、NO.I249605、NO.I276276
CN-PAT. NO.583196、NO.614620、NO.614798、NO.614884、NO.692483
US-PAT. NO.6851773、NO.6860575、NO.6883884、NO.6899408、NO.6935710、NO.2393477、NO.2400541、NO.2400785
GB-PAT. NO.2400786、NO.2401534、NO.2420964、NO.2425245
DE-PAT. NO.20215143.3、NO.20308323.7、NO.20308324.5、NO.20308325.3、NO.20308326.1、NO.202004019451.1、NO.202006001270.2

JP-PAT. NO.3093452、NO.3097862、NO.3097863、NO.3097864、NO.3098133、NO.3116135、NO.3121054



Specifications / Features


- Height: 41mm (1.6 inches)
Load capacity up to 45.5kg (100 lbs) / pair
- Installation : Bracket : Screw-on
Chassis : Stab-in/Screw-on
Cable Management Arm : Tool-less
- Function: Lock-in/out & Two Way Front Release, Front Disconnect
- Finish : Electroplated Zinc, Clear Bright or Black
- Material : Cold Rolled Steel
- Packing : 156 pairs/crate
- Application: For Chassis 1U - 4U
Depth : 350mm - 711mm
Width : 425mm - 434mm

Installation Dimensions

unit:mm		
ITEM NO	LENGTH mm(inch)	TRAVEL mm(inch)
3A60-711	711.0 (28)	671.0 (26.40)

3A61

Full Extension Ball Bearing Slide With Bracket & Cable Management Arm

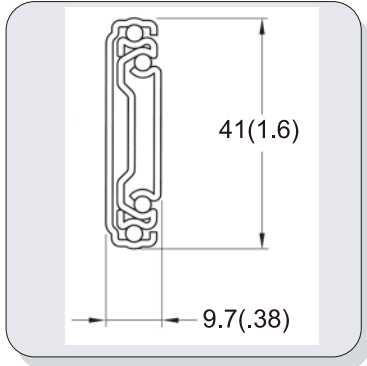

3A61 This product line holds the following patents from various countries:

TW-PAT. NO.203242、NO.215740、NO.216637、NO.216740、NO.225569、NO.I249605、NO.I276276、NO.I304721、NO.I305138
CN-PAT. NO.583196、NO.614620、NO.614798、NO.614884、NO.692483、NO.438406
US-PAT. NO.6851773、NO.6860575、NO.6883884、NO.6899408、NO.6935710
GB-PAT. NO.2393477、NO.2400541、NO.2400785、NO.2400786、NO.2401534、NO.2420964、NO.2425245、NO.2442701
DE-PAT. NO.20215143.3、NO.20308323.7、NO.20308324.5、NO.20308325.3、NO.20308326.1、NO.202004019451.1、NO.202006001270.2、NO.202006014358.0、NO.202006015751.4

JP-PAT. NO.3093452、NO.3097862、NO.3097863、NO.3097864、NO.3098133、NO.3116135、NO.3121054、NO.3127644、NO.3128375



Specifications / Features


- Height: 41mm (1.6 inches)
Load capacity up to 45.5kg (100 lbs) / pair
- Installation : Bracket : Tool-less
Chassis : Stab-in/Screw-on
Cable Management Arm : Tool-less
- Function: Lock-in/out & Two Way Front Release, Front Disconnect
- Finish : Electroplated Zinc, Clear Bright or Black
- Material : Cold Rolled Steel
- Packing : 156 pairs/crate
- Application: For Chassis 1U - 4U
Depth : 350mm - 730mm
Width : 425mm - 434mm

Installation Dimensions

unit:mm		
ITEM NO	LENGTH mm(inch)	TRAVEL mm(inch)
3A61-725	671 (26.42)	718 (28.27)
3A61-730	730 (28.74)	764 (30.08)

3A68

Full Extension Ball Bearing Slide

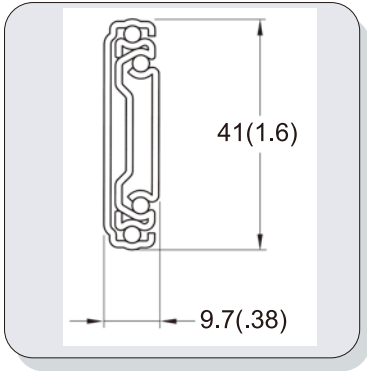

3A68 This product line holds the following patents from various countries:

TW-PAT. NO.215740、NO.216637、NO.216740、NO.225569
CN-PAT. NO.614620、NO.614798、NO.614884、NO.692483
US-PAT. NO.6851773、NO.6860575、NO.6899408、NO.6935710
GB-PAT. NO.2400541、NO.2400785、NO.2400786、NO.2401534
DE-PAT. NO.20308323.7、NO.20308324.5、NO.20308325.3、NO.20308326.1
JP-PAT. NO.3097862、NO.3097863、NO.3097864、NO.3098133



Specifications / Features


- Height:
41mm (1.6 inches)
Load capacity up to 47.6kg (105 lbs) / pair
- Installation :
Bracket : Screw-on
- Function:
Lock-out & Two Way Front Release,
Front Disconnect
- Finish :
Electroplated Zinc
- Material :
Cold Rolled Steel
- Packing :
500 pairs/crate
- Application:
For Chassis 1U - 4U
Depth : 305mm - 813mm
Width : 425mm - 434mm

Installation Dimensions

unit:mm		
ITEM NO	LENGTH mm(inch)	TRAVEL mm(inch)
3A68-305	304.8 (12)	355.6 (14)
3A68-355	355.6 (14)	406.4 (16)
3A68-406	406.4 (16)	457.2 (18)
3A68-457	457.2 (18)	508.0 (20)
3A68-508	508.0 (20)	558.8 (22)
3A68-559	558.8 (22)	609.6 (24)
3A68-610	609.6 (24)	660.4 (26)
3A68-660	660.4 (26)	711.2 (28)
3A68-711	711.2 (28)	762.0 (30)
3A68-762	762.0 (30)	812.8 (32)
3A68-813	812.8 (32)	863.6 (34)

3A68-0A

Full Extension Ball Bearing Slide With Bracket

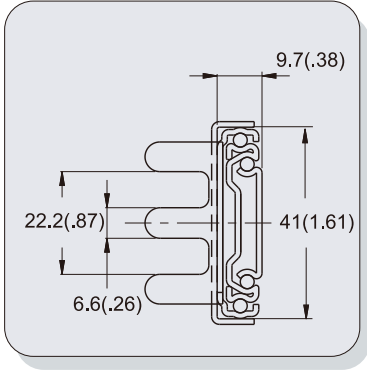

3A68-0A This product line holds the following patents from various countries:

TW-PAT. NO.215740、NO.216637、NO.216740、NO.225569
CN-PAT. NO.614620、NO.614798、NO.614884、NO.692483
US-PAT. NO.6851773、NO.6860575、NO.6899408、NO.6935710
GB-PAT. NO.2400541、NO.2400785、NO.2400786、NO.2401534
DE-PAT. NO.20308323.7、NO.20308324.5、
NO.20308325.3、NO.20308326.1
JP-PAT. NO.3097862、NO.3097863、
NO.3097864、NO.3098133



Specifications / Features


- Height:
41mm (1.6 inches)
Load capacity up to 47.6kg (105 lbs) / pair
- Installation :
Bracket (3-Talon) : Screw-on
- Function:
Lock-out & Two Way Front Release,
Front Disconnect
- Finish :
Electroplated Zinc, Clear Bright or Black
- Material :
Cold Rolled Steel
- Packing :
1 set/box 10 boxes/carton
- Application:
For Chassis 1U - 4U
Depth : 305mm - 813mm
Width : 425mm - 434mm

Installation Dimensions

unit:mm		
ITEM NO	LENGTH mm(inch)	TRAVEL mm(inch)
3A68-305	304.8 (12)	355.6 (14)
3A68-355	355.6 (14)	406.4 (16)
3A68-406	406.4 (16)	457.2 (18)
3A68-457	457.2 (18)	508.0 (20)
3A68-508	508.0 (20)	558.8 (22)
3A68-559	558.8 (22)	609.6 (24)
3A68-610	609.6 (24)	660.4 (26)
3A68-660	660.4 (26)	711.2 (28)
3A68-711	711.2 (28)	762.0 (30)
3A68-762	762.0 (30)	812.8 (32)
3A68-813	812.8 (32)	863.6 (34)

3A68-0C

Full Extension Ball Bearing Slide With Bracket

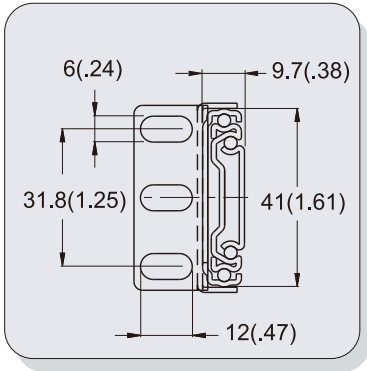

3A68-0C This product line holds the following patents from various countries:

TW-PAT. NO.215740、NO.216637、NO.216740、NO.225569
CN-PAT. NO.614620、NO.614798、NO.614884、NO.692483
US-PAT. NO.6851773、NO.6860575、NO.6899408、NO.6935710
GB-PAT. NO.2400541、NO.2400785、NO.2400786、NO.2401534
DE-PAT. NO.20308323.7、NO.20308324.5、
NO.20308325.3、NO.20308326.1
JP-PAT. NO.3097862、NO.3097863、
NO.3097864、NO.3098133



Specifications / Features


- ◆ **Height:**
41mm (1.6 inches)
Load capacity up to 47.6kg (105 lbs) / pair
- ◆ **Installation :**
Bracket (3-Hole) : Screw-on
- ◆ **Function:**
Lock-out & Two Way Front Release,
Front Disconnect
- ◆ **Finish :**
Electroplated Zinc, Clear Bright or Black
- ◆ **Material :**
Cold Rolled Steel
- ◆ **Packing :**
1 set/box 10 boxes/carton
- ◆ **Application:**
For Chassis 1U - 4U
Depth : 305mm - 813mm
Width : 425mm - 434mm

Installation Dimensions

ITEM NO	unit:mm	
	LENGTH mm(inch)	TRAVEL mm(inch)
3A68-305	304.8 (12)	355.6 (14)
3A68-355	355.6 (14)	406.4 (16)
3A68-406	406.4 (16)	457.2 (18)
3A68-457	457.2 (18)	508.0 (20)
3A68-508	508.0 (20)	558.8 (22)
3A68-559	558.8 (22)	609.6 (24)
3A68-610	609.6 (24)	660.4 (26)
3A68-660	660.4 (26)	711.2 (28)
3A68-711	711.2 (28)	762.0 (30)
3A68-762	762.0 (30)	812.8 (32)
3A68-813	812.8 (32)	863.6 (34)

AR68

Heavy Duty Slide With Bracket

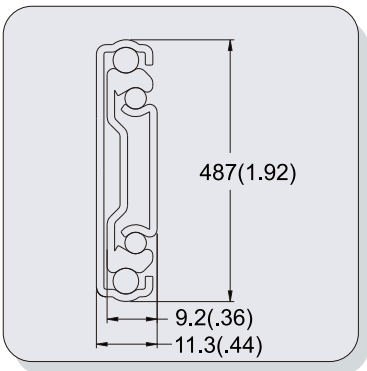

AR68 This product line holds the following patents from various countries:

TW-PAT. NO.215740、NO.216637、NO.225569、NO.I271168
CN-PAT. NO.614620、NO.614798、NO.692483
US-PAT. NO.6860575、NO.6851773、NO.6935710、NO.7357468
GB-PAT. NO.2401534、NO.2400786、NO.2400785、NO.2434081
DE-PAT. NO.20308323.7、NO.20308324.5、NO.20308325.3、
NO.202006000519.6
JP-PAT. NO.3097864、NO.3097863、NO.3098133、
NO.3120872



Specifications / Features


- ◆ **Height:**
48.7mm (1.917 inches)
Load capacity up to 68.0 kg (150 lbs) / pair
- ◆ **Installation :**
Bracket : Screw-on
Chassis : Stab-in/Screw-on
- ◆ **Function:**
Lock-out & Two Way Front Release,
Front Disconnect
- ◆ **Finish :**
Electroplated Zinc, Clear Bright or Black
- ◆ **Material :**
Cold Rolled Steel
- ◆ **Packing :**
500 pcs/crate
- ◆ **Application:**
For Chassis 3U - 7U
Depth : 508mm - 813mm
Width : 425mm - 430mm

Installation Dimensions

ITEM NO	unit:mm	
	LENGTH mm(inch)	TRAVEL mm(inch)
AR68-508	508.0 (20)	541.6 (21.32)
AR68-559	558.8 (22)	592.4 (23.32)
AR68-610	609.6 (24)	643.2 (25.32)
AR68-660	660.4 (26)	694.0 (27.32)
AR68-686	686.1 (27)	736.1 (28.98)
AR68-711	711.2 (28)	744.8 (29.32)
AR68-762	762.0 (30)	795.6 (31.32)
AR68-813	812.8 (32)	846.4 (33.32)

3B61

Full Extension Ball Bearing Slide With Bracket & Cable Management Arm

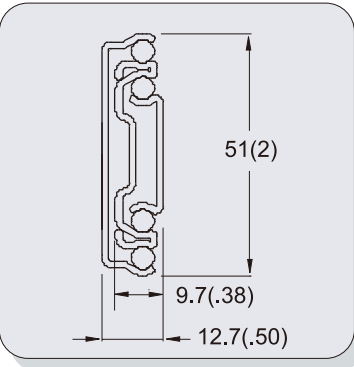

3B61 This product line holds the following patents from various countries:

TW-PAT. NO.203242、NO.215740、NO.216637、NO.216740、NO.225569、
NO.I249605、NO.I276276、NO.I304721、NO.I305138
CN-PAT. NO.583196、NO.614620、NO.614798、NO.614884、
NO.692483、NO.438406
US-PAT. NO.6851773、NO.6860575、NO.6883884、NO.6899408、NO.6935710
GB-PAT. NO.2393477、NO.2400541、NO.2400785、NO.2400786、
NO.2401534、NO.2420964、NO.2425245、NO.2442701
DE-PAT. NO.20215143.3、NO.20308323.7、NO.20308324.5、NO.20308325.3、
NO.20308326.1、NO.202004019451.1、
NO.202006001270.2、
NO.202006014358.0、
NO.202006015751.4

JP-PAT. NO.3093452、NO.3097862、
NO.3097863、NO.3097864、
NO.3098133、NO.3116135、
NO.3121054、NO.3127644、
NO.3128375



Specifications / Features


- Height: 51mm (2 inches)
Load capacity up to 68.0kg (150 lbs) / pair
- Installation : Bracket : Tool-less
Chassis : Stab-in/Screw-on
Cable Management Arm : Tool-less
- Function: Lock-in/out & Two Way Front Release, Front Disconnect
- Finish : Electroplated Zinc, Clear Bright or Black
- Material : Cold Rolled Steel
- Packing : 1 set/box 50 boxes/carton
- Application: For Chassis 3U - 7U
Depth : 350mm - 705mm
Width : 423.5mm - 430mm

Installation Dimensions

unit:mm		
ITEM NO	LENGTH mm(inch)	TRAVEL mm(inch)
3B61-705	705 (27.76)	700 (27.56)

3B35

Full Extension Ball Bearing Slide

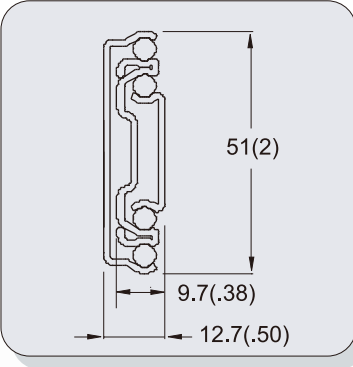

3B35 This product line holds the following patents from various countries:

TW-PAT. NO.190765、NO.198744、NO.212545
CN-PAT. NO.504483、NO.504731、NO.605253
US-PAT. NO.6367899、NO.6585335、NO.6860574
DE-PAT. NO.20116328.4、NO.20116513.9



Specifications / Features


- Height: 51mm (2 inches)
Load capacity up to 68.0kg (150 lbs) / pair
- Installation : Bracket : Screw-on
Chassis : Screw-on
- Function: Lock-out & One Way Front Release, Front Disconnect
- Finish : Electroplated Zinc, Clear Bright or Black
- Material : Cold Rolled Steel
- Packing : 500 pcs/crate
- Application: For Chassis 3U - 7U
Depth : 350mm - 711mm
Width : 425mm - 430mm

Installation Dimensions

unit:mm		
ITEM NO	LENGTH mm(inch)	TRAVEL mm(inch)
3B35-508	508.0 (20)	527.3 (21)
3B35-559	558.8 (22)	578.1 (23)
3B35-610	609.6 (24)	628.9 (25)
3B35-661	660.4 (26)	679.7 (27)
3B35-711	711.2 (28)	730.5 (29)

3B66

Full Extension Ball Bearing Slide

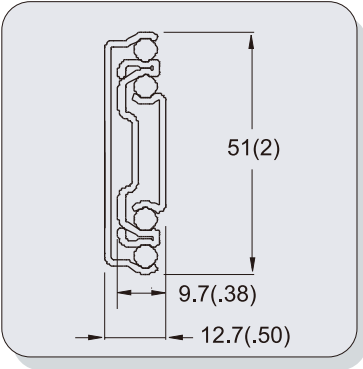

3B66 This product line holds the following patents from various countries:

TW-PAT. NO.215740、NO.216637、NO.216740、NO.225569
CN-PAT. NO.614620、NO.614798、NO.614884、NO.692483
US-PAT. NO.6851773、NO.6860575、NO.6899408、NO.6935710
GB-PAT. NO.2400541、NO.2400785、NO.2400786、NO.2401534
DE-PAT. NO.20308323.7、NO.20308324.5、
NO.20308325.3、NO.20308326.1
JP-PAT. NO.3097862、NO.3097863、
NO.3097864、NO.3098133



Specifications / Features


- ◆ **Height:**
51mm (2 inches)
Load capacity up to 68.0kg (150 lbs) / pair
- ◆ **Installation :**
Bracket : Screw-on
Chassis : Stab-in
- ◆ **Function:**
Lock-out & Two Way Front Release,
Front Disconnect
- ◆ **Finish :**
Electroplated Zinc, Clear Bright or Black
- ◆ **Material :**
Cold Rolled Steel
- ◆ **Packing :**
500 pcs/crate
- ◆ **Application:**
For Chassis 3U - 7U
Depth : 350mm - 757mm
Width : 425mm - 430mm

Installation Dimensions

unit:mm		
ITEM NO	LENGTH mm(inch)	TRAVEL mm(inch)
3B66-725	725.0 (28.54)	762.0 (30.00)
3B66-757	757.0 (29.80)	778.0 (30.63)

AE68

Heavy Duty Slide With Bracket

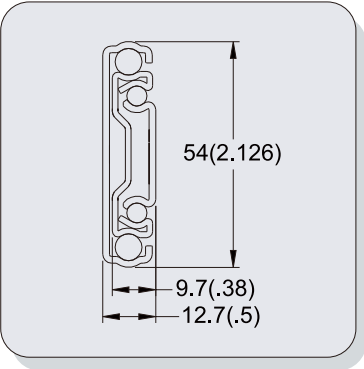

AE68 This product line holds the following patents from various countries:

TW-PAT. NO.215740、NO.216637、NO.225569、NO.I271168
CN-PAT. NO.614620、NO.614798、NO.692483
US-PAT. NO.6851773、NO.6860575、NO.6935710、NO.7357468
GB-PAT. NO.2400785、NO.2400786、NO.2401534、NO.2434081
DE-PAT. NO.20308323.7、NO.20308324.5、NO.20308325.3、
NO.202006000519.6
JP-PAT. NO.3097863、NO.3097864、
NO.3098133、NO.3120872



Specifications / Features


- ◆ **Height:**
54 mm (2.126 inches)
Load capacity up to 90.7 kg (200 lbs) / pair
- ◆ **Installation :**
Bracket : Screw-on
Chassis : Screw-on
- ◆ **Function:**
Lock-out & Two Way Front Release,
Front Disconnect
- ◆ **Finish :**
Electroplated Zinc, Clear Bright or Black
- ◆ **Material :**
Cold Rolled Steel
- ◆ **Packing :**
500 pcs/crate
- ◆ **Application:**
For Chassis 3U - 7U up
Depth : 350mm - 813mm
Width : 425mm - 430mm

Installation Dimensions

unit:mm		
ITEM NO	LENGTH mm(inch)	TRAVEL mm(inch)
AE68-355	355.6 (14)	406.4 (16)
AE68-406	406.4 (16)	457.2 (18)
AE68-457	457.2 (18)	508.0 (20)
AE68-508	508.0 (20)	558.8 (22)
AE68-559	558.8 (22)	609.6 (24)
AE68-610	609.6 (24)	660.4 (26)
AE68-660	660.4 (26)	711.2 (28)
AE68-711	711.2 (28)	762.0 (30)
AE68-762	762.0 (30)	812.8 (32)
AE68-813	812.8 (32)	863.6 (34)

3X68

Heavy Duty Slide With Bracket

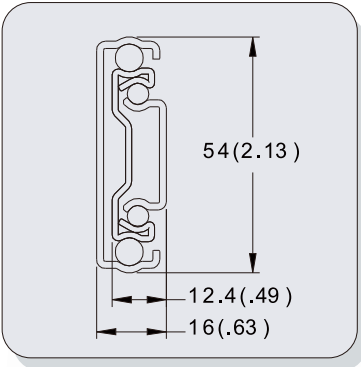

3X68 This product line holds the following patents from various countries:

TW-PAT. NO.215740、NO.216637、NO.225569、NO.I271168
CN-PAT. NO.614620、NO.614798、NO.692483
US-PAT. NO.6860575、NO.6851773、NO.6935710、NO.7357468
GB-PAT. NO.2401534、NO.2400786、NO.2400785、NO.2434081
DE-PAT. NO.20308323.7、NO.20308324.5、NO.20308325.3、
NO.202006000519.6
JP-PAT. NO.3097864、NO.3097863、
NO.3098133、NO.3120872



Specifications / Features


- Height:
54mm (2.13 inches)
Load capacity up to 90.7kg (200 lbs) / pair
- Installation :
Bracket : Screw-on
- Function:
Lock-out & Two Way Front Release,
Front Disconnect
- Finish :
Electroplated Zinc, Clear Bright or Black
- Material :
Cold Rolled Steel
- Packing :
500 pcs/crate
- Application:
For Chassis 3U - 7U up
Depth : 350mm - 686mm
Width : 425mm - 430mm

Installation Dimensions

ITEM NO	unit:mm	
	LENGTH mm(inch)	TRAVEL mm(inch)
3X68-355	355.6 (14)	406.4 (16)
3X68-406	406.4 (16)	457.2 (18)
3X68-457	457.2 (18)	508.0 (20)
3X68-508	508.0 (20)	558.8 (22)
3X68-559	558.8 (22)	609.6 (24)
3X68-610	609.6 (24)	660.4 (26)
3X68-660	660.4 (26)	711.2 (28)
3X68-711	711.2 (28)	762.0 (30)
3X68-762	762.0 (30)	812.8 (32)
3X68-813	812.8 (32)	863.6 (34)

AD23

Heavy Duty Slide-Standard Type

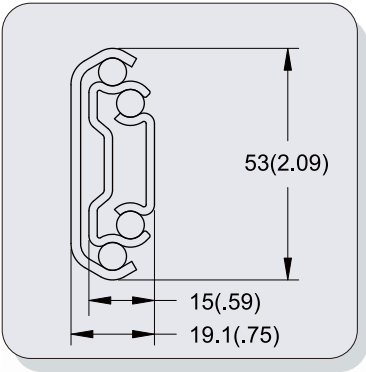

Specifications / Features


- Height:
53mm (2.09 inches)
Load capacity up to 136.1kg (300 lbs) / pair
- Installation :
Chassis : Screw-on
- Function:
Non-disconnect
- Finish :
Electroplated Zinc
- Material :
Cold Rolled Steel
- Packing :
Unit Packet : 6 pairs/carton
Bulk Packet : 12 pcs/carton

Installation Dimensions

ITEM NO	unit:mm	
	LENGTH mm(inch)	TRAVEL mm(inch)
AD23-300	305.0 (12.00)	321 (12.64)
AD23-350	355.0 (13.98)	371 (14.61)
AD23-400	405.8 (15.98)	425 (16.73)
AD23-450	456.6 (17.99)	476 (18.74)
AD23-500	507.4 (20.00)	528 (20.79)
AD23-550	558.2 (22.00)	579 (22.80)
AD23-600	609.0 (24.02)	631 (24.84)
AD23-650	659.8 (26.02)	683 (26.89)
AD23-700	710.6 (28.03)	734 (28.90)
AD23-750	761.4 (30.04)	785 (30.91)
AD23-800	812.2 (32.05)	837 (32.95)

AD68

Heavy Duty Slide With Bracket

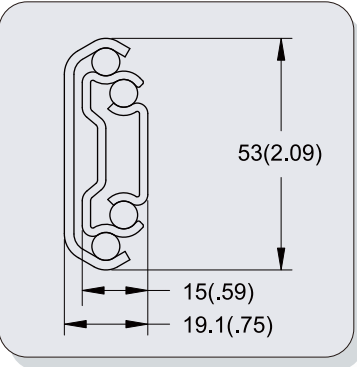

AD68 This product line holds the following patents from various countries:

TW-PAT. NO.215740、NO.216637、NO.225569、NO.I271168
CN-PAT. NO.614620、NO.614798、NO.692483
US-PAT. NO.6860575、NO.6851773、NO.6935710、NO.7357468
GB-PAT. NO.2401534、NO.2400786、NO.2400785、NO.2434081
DE-PAT. NO.20308323.7、NO.20308324.5、NO.20308325.3、
NO.202006000519.6
JP-PAT. NO.3097864、NO.3097863、NO.3098133、NO.3120872



Specifications / Features


- Height: 53mm (2.09 inches)
Load capacity up to 136.1kg (300 lbs) / pair
- Installation : Bracket : Screw-on
Chassis : Screw-on
- Function: Lock-out & Two Way Front Release, Front Disconnect
- Finish : Electroplated Zinc, Clear Bright or Black
- Material : Cold Rolled Steel
- Packing : 500 pcs/crate
- Application: For Chassis 3U - 7U up
Depth : 508mm - 813mm
Width : 417mm - 420mm

Installation Dimensions

unit:mm		
ITEM NO	LENGTH mm(inch)	TRAVEL mm(inch)
AD68-508	508.0 (20)	541.6 (21.32)
AD68-559	558.8 (22)	592.4 (23.32)
AD68-610	609.6 (24)	643.2 (25.32)
AD68-660	660.4 (26)	694.0 (27.32)
AD68-686	686.1 (27)	736.1 (28.98)
AD68-711	711.2 (28)	744.8 (29.32)
AD68-762	762.0 (30)	795.6 (31.32)
AD68-813	812.8 (32)	846.4 (33.32)

3C28

Full Extension Ball Bearing Slide

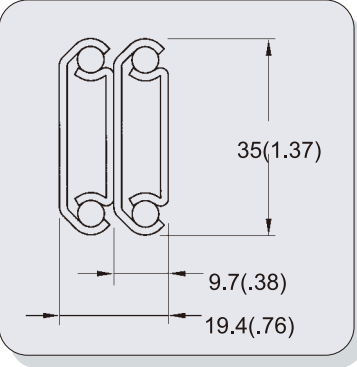

3C28 This product line holds the following patents from various countries:

TW-PAT. NO.187359、NO.191093
CN-PAT. NO.559816、NO.559930
US-PAT. NO.6457790、NO.6464311
DE-PAT. NO.20106080.9



Specifications / Features


- Height: 35mm (1.37 inches)
Load capacity up to 45.5kg (100 lbs) / pair
- Installation : Bracket : Screw-on
Chassis : Screw-on
- Function: Lock-out & Side Release, Front Disconnect
- Finish : Electroplated Zinc, Clear Bright or Black
- Material : Cold Rolled Steel
- Packing : 800 pcs/crate
- Application: For Chassis 1U - 4U
Depth : 355mm - 814mm
Width : 425mm - 430mm

Installation Dimensions

unit:mm		
ITEM NO	LENGTH mm(inch)	TRAVEL mm(inch)
3C28-355	355 (14)	381 (15)
3C28-406	406 (16)	432 (17)
3C28-457	457 (18)	483 (19)
3C28-508	508 (20)	534 (21)
3C28-559	559 (22)	585 (23)
3C28-610	610 (24)	636 (25)
3C28-661	661 (26)	687 (27)
3C28-712	712 (28)	738 (29)
3C28-763	763 (30)	789 (31)
3C28-814	814 (32)	840 (33)

3C29

Full Extension Ball Bearing Slide

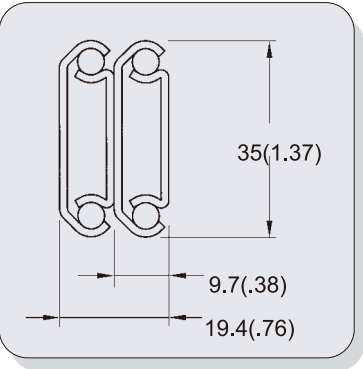

3C29 This product line holds the following patents from various countries:

TW-PAT. NO.191092 、 NO.191093
CN-PAT. NO.501722 、 NO.559930
US-PAT. NO.6412891 、 NO.6464311
DE-PAT. NO.20106081.7 、 NO.20106080.9



Specifications / Features


- Height:
35mm (1.37 inches)
Load capacity up to 45.5kg (100 lbs) / pair
- Installation :
Bracket : Screw-on
Chassis : Screw-on
- Function:
Lock-out & One Way Front Release,
Front Disconnect
- Finish :
Electroplated Zinc, Clear Bright or Black
- Material :
Cold Rolled Steel
- Packing :
800 pcs/crate
- Application:
For Chassis 1U - 4U
Depth : 355mm - 814mm
Width : 425mm - 430mm

Installation Dimensions

unit:mm		
ITEM NO	LENGTH mm(inch)	TRAVEL mm(inch)
3C29-355	355 (14)	381 (15)
3C29-406	406 (16)	432 (17)
3C29-457	457 (18)	483 (19)
3C29-508	508 (20)	534 (21)
3C29-559	559 (22)	585 (23)
3C29-610	610 (24)	636 (25)
3C29-661	661 (26)	687 (27)
3C29-712	712 (28)	738 (29)
3C29-763	763 (30)	789 (31)
3C29-814	814 (32)	840 (33)

3C60

Full Extension Ball Bearing Slide With Bracket & Cable Management Arm

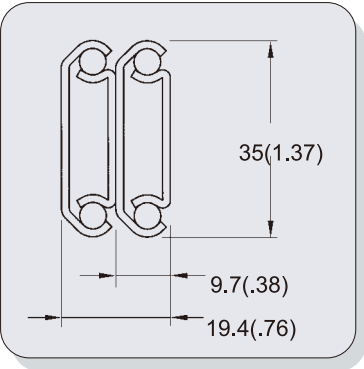

3C60 This product line holds the following patents from various countries:

TW-PAT. NO.202233 、 NO.203242 、 NO.209360 、 NO.209361 、
NO.209362 、 NO.216740
CN-PAT. NO.578465 、 NO.583196 、 NO.584971 、 NO.614884
US-PAT. NO.6715718 、 NO.6883884 、 NO.6945504 、 NO.6899408
GB-PAT. NO.2392081 、 NO.2392608 、 NO.2393477 、 NO.2400541
DE-PAT. NO.20213684.1 、 NO.20215143.3 、 NO.20215719.9 、
NO.20308326.1
JP-PAT. NO.3091932 、 NO.3093452 、 NO.3093453 、
NO.3097862



Specifications / Features


- Height:
35mm (1.37 inches)
Load capacity up to 45.5kg (100 lbs) / pair
- Installation :
Bracket : Screw-on
Chassis : Screw-on
Cable Management Arm: Tool-less
- Function:
Lock-in/out & One Way Front Release,
Front Disconnect
- Finish :
Electroplated Zinc, Clear Bright or Black
- Material :
Cold Rolled Steel
- Packing :
156 pcs/crate
- Application:
For Chassis 1U - 4U
Depth : 350mm - 620mm
Width : 425mm - 428mm

Installation Dimensions

unit:mm		
ITEM NO	LENGTH mm(inch)	TRAVEL mm(inch)
3C60-485	485 (19)	556 (22)
3C60-580	580 (23)	736 (29)

3C34

Full Extension Ball Bearing Slide

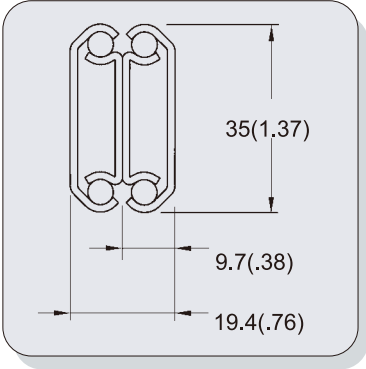

Specifications / Features



- Height: 35mm (1.37 inches)
Load capacity up to 45.5kg (100 lbs) / pair
- Installation : Chassis : Screw-on
- Function: Non-disconnect
- Finish : Electroplated Zinc
- Material : Cold Rolled Steel
- Packing : 800 pairs/crate

Installation Dimensions

unit:mm		
ITEM NO	LENGTH mm(inch)	TRAVEL mm(inch)
3C34-304	304.8 (12)	330 (13)
3C34-355	355.6 (14)	382 (15)
3C34-406	406.4 (16)	433 (17)
3C34-457	457.2 (18)	485 (19)
3C34-508	508.0 (20)	537 (21)
3C34-558	558.8 (22)	585 (23)
3C34-609	609.6 (24)	637 (25)
3C34-660	660.4 (26)	688 (27)
3C34-711	711.2 (28)	740 (29)
3C34-762	762.0 (30)	792 (31)
3C34-812	812.8 (32)	843 (33)

3D29

Full Extension Ball Bearing Slide

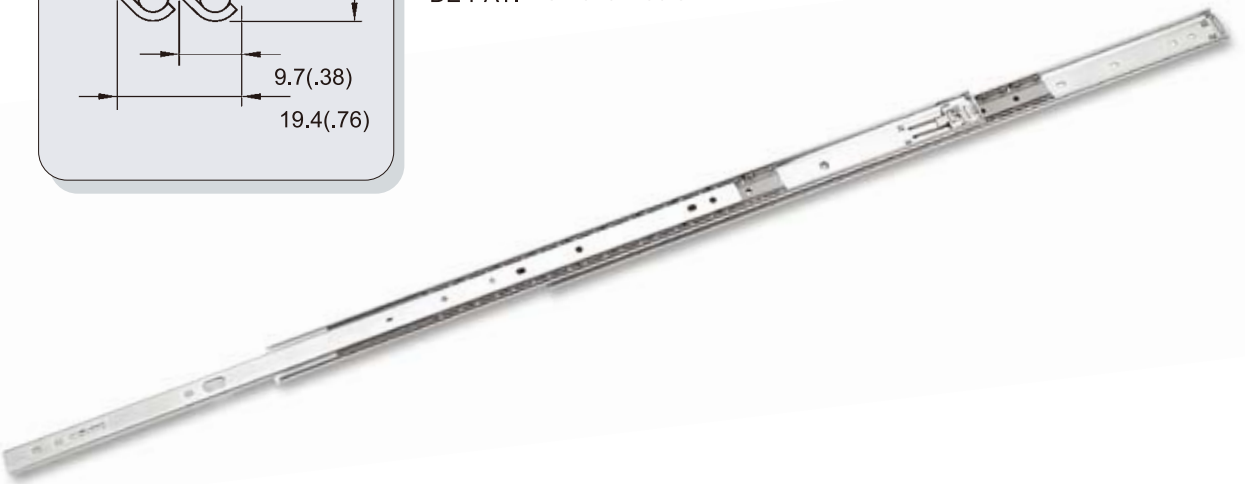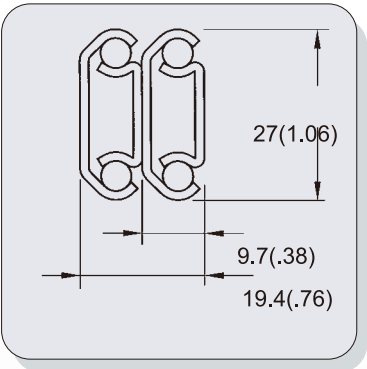

3D29 This product line holds the following patents from various countries:

TW-PAT. NO.195915 、NO.202209
CN-PAT. NO.532901
US-PAT. NO.6585337
DE-PAT. NO.20202750.3

Specifications / Features


- Height: 27mm (1.06 inches)
Load capacity up to 43.0kg (95 lbs) / pair
- Installation : Bracket : Screw-on
Chassis : Screw-on
- Function: Lock-out & One Way Front Release, Front Disconnect
- Finish : Electroplated Zinc, Clear Bright or Black
- Material : Cold Rolled Steel
- Packing : 10 pairs/carton
- Application: For Chassis 1U - 2U
Depth : 300mm - 800mm
Width : 425mm - 430mm

Installation Dimensions

unit:mm		
ITEM NO	LENGTH mm(inch)	TRAVEL mm(inch)
3D29-300	300 (12)	320 (12.60)
3D29-350	350 (14)	370 (14.57)
3D29-400	400 (16)	420 (16.54)
3D29-450	450 (18)	470 (18.50)
3D29-500	500 (20)	520 (20.47)
3D29-550	550 (22)	570 (22.44)
3D29-600	600 (24)	620 (24.41)
3D29-650	650 (26)	670 (26.38)
3D29-700	700 (28)	720 (28.35)
3D29-750	750 (30)	770 (30.31)
3D29-800	800 (32)	820 (32.28)

3D61

Full Extension Ball Bearing Slide With Bracket

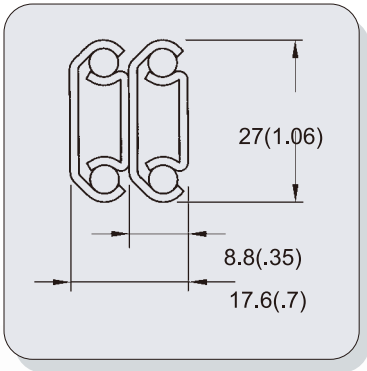

3D61 This product line holds the following patents from various countries:
TW-PAT. NO.195915 、NO.202209
CN-PAT. NO.532901
US-PAT. NO.6585337
DE-PAT. NO.20202750.3



Specifications / Features


- Height: 27mm (1.06 inches)
Load capacity up to 39.0kg (86 lbs) / pair
- Installation : Bracket : Screw-on
Chassis : Screw-on
- Function: Lock-out & One Way Front Release, Front Disconnect
- Finish : Electroplated Zinc, Clear Bright or Black
- Material : Cold Rolled Steel
- Packing : 8 pcs/carton
- Application: For Chassis 1U - 2U
Depth : 350mm - 660mm
Width : 430mm - 432mm

Installation Dimensions

unit:mm		
ITEM NO	LENGTH mm(inch)	TRAVEL mm(inch)
3D61-650	660.4 (26.00)	670 (26.38)

3S55

Full Extension Ball Bearing Slide With Bracket

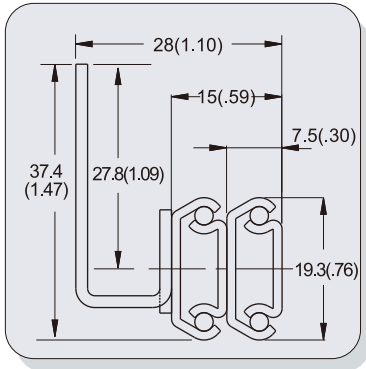

3S55 This product line holds the following patents from various countries:
TW-PAT. NO.I271169 、NO.I271168 、NO.I275369
CN-PAT. NO.477204
US-PAT. NO.7357468 、NO.7441848
GB-PAT. NO.2434175 、NO.2434081 、NO.2434306
DE-PAT. NO.202006000518.8 、NO.202006000919.1 、NO.202006000519.6
JP-PAT. NO.3120872 、NO.3120873 、NO.3121104



Specifications / Features


- Height: 19.3mm (0.76 inches)
Load capacity up to 22.7kg (50 lbs) / pair
- Installation : Bracket : Screw-on
- Function: Hold-out & One Way Front Release, Front Disconnect, Self-Closing
- Finish : Electroplated Zinc, Clear Bright or Black
- Material : Cold Rolled Steel
- Packing : 1296 pcs/woodcase

Installation Dimensions

unit:mm		
ITEM NO	LENGTH mm(inch)	TRAVEL mm(inch)
3S55-384	386.0 (15.20)	477.0 (18.78)

3S30

Full Extension Ball Bearing Slide

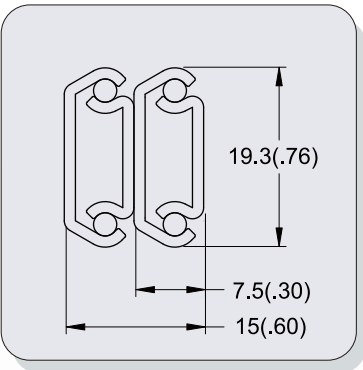

3S30 This product line holds the following patents from various countries:
TW-PAT. NO.I271169 、NO.I271168
CN-PAT. NO.477204
US-PAT. NO.7357468
GB-PAT. NO.2434175 、NO.2434081
DE-PAT. NO.202006000518.8 、NO.202006000519.6
JP-PAT. NO.3120872 、NO.3121104



Specifications / Features


- ◆ **Height:**
19.3 mm (0.76 inches)
Load capacity up to 22.7 kg (50 lbs) / pair
- ◆ **Installation :**
Chassis : Screw-on
- ◆ **Function:**
Hold-out & One Way Front Release,
Front Disconnect
- ◆ **Finish :**
Electroplated Zinc, Clear Bright or Black
- ◆ **Material :**
Cold Rolled Steel
- ◆ **Packing :**
500 pcs/crate

Installation Dimensions

unit:mm		
ITEM NO	LENGTH mm(inch)	TRAVEL mm(inch)
3S30-371	371 (14.61)	452 (17.80)

3T30

Full Extension Ball Bearing Slide

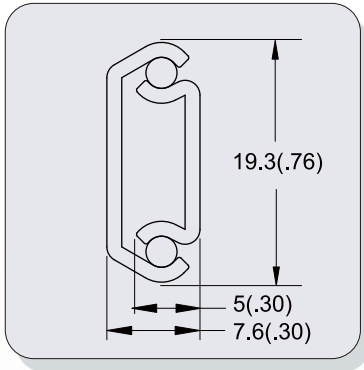

3T30 This product line holds the following patents from various countries:
TW-PAT. NO.I271169
CN-PAT. NO.477204
US-PAT. PENDING
GB-PAT. NO.2434175
DE-PAT. NO.202006000518.8
JP-PAT. NO.3121104



Specifications / Features


- ◆ **Height:**
19.3mm (0.76 inches)
Load capacity up to 22.7kg (50 lbs) / pair
- ◆ **Installation :**
Chassis : Screw-on
- ◆ **Function:**
Hold-out & One Way Front Release,
Front Disconnect
- ◆ **Finish :**
Electroplated Zinc, Clear Bright or Black
- ◆ **Material :**
Cold Rolled Steel
- ◆ **Packing :**
500 pcs/crate

Installation Dimensions

unit:mm		
ITEM NO	LENGTH mm(inch)	TRAVEL mm(inch)
3T30-525-I	525 (20.67)	136 (05.35)
3T30-600-L	686 (27.01)	441 (17.36)
3T30-600-S	686 (27.01)	151 (05.94)

3G35

3/4 Extension Ball Bearing Slide With Bracket

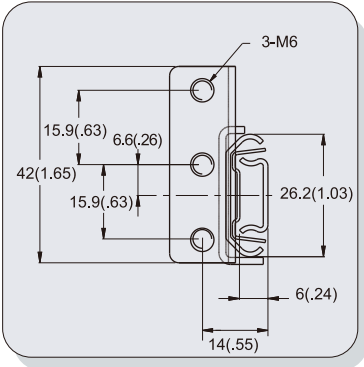

3G35 This product line holds the following patents from various countries:

TW-PAT. NO.195915
CN-PAT. NO.532901
US-PAT. NO.6585337
DE-PAT. NO.20202750.3



Specifications / Features


- Height: 26.2 mm (1.03 inches)
Load capacity up to 36.3 kg (80 lbs) / pair
- Installation : Bracket : Screw-on
Chassis : Stab-in/Screw-on
- Function: Lock-out & One Way Front Release, Front Disconnect
- Finish : Electroplated Zinc, Clear Bright or Black
- Material : Cold Rolled Steel
- Packing : 120 pcs/crate
- Application: For Chassis 1U - 2U
Depth : 350mm - 650mm
Width : 435mm - 437mm

Installation Dimensions

unit:mm		
ITEM NO	LENGTH mm(inch)	TRAVEL mm(inch)
3G35-650	650.0 (25.60)	374.0 (14.72)

3535

3/4 Extension Ball Bearing Slide

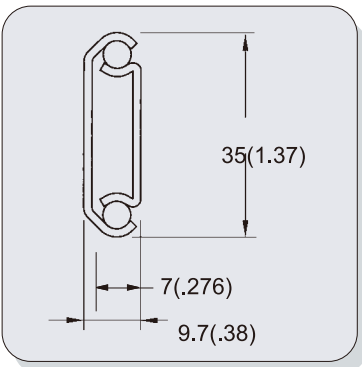

3535 This product line holds the following patents from various countries:

TW-PAT. NO.191092
CN-PAT. NO.501722
US-PAT. NO.6412891
DE-PAT. NO.20106081.7



Specifications / Features

- Height: 35mm (1.37 inches)
Load capacity up to 45.5kg (100 lbs) / pair
- Installation : Bracket : Screw-on
- Function: Lock-out & One Way Front Release, Front Disconnect
- Finish : Electroplated Zinc, Clear Bright or Black
- Material : Cold Rolled Steel
- Packing : 20 pairs/carton
- Application: For Chassis 1U - 2U
Depth : 355mm - 710mm
Width : 425mm - 434mm

Installation Dimensions

unit:mm		
ITEM NO	LENGTH mm(inch)	TRAVEL mm(inch)
3535-355	355 (14.00)	247 (09.72)
3535-406	406 (16.00)	297 (11.69)
3535-457	457 (18.00)	347 (13.66)
3535-508	508 (20.00)	397 (15.62)
3535-559	559 (22.00)	422 (16.61)
3535-610	610 (24.00)	447 (17.60)
3535-661	661 (26.00)	472 (18.58)
3535-712	710 (28.00)	499 (19.65)